


JRC-10



- Selecting each 5 speaker zone or total area.
- Play back, stop and repeating of recorded message by using JDM-10
- LED display when power on and data output.
- Pressing talk switch, mic signal is activated after chime bell.

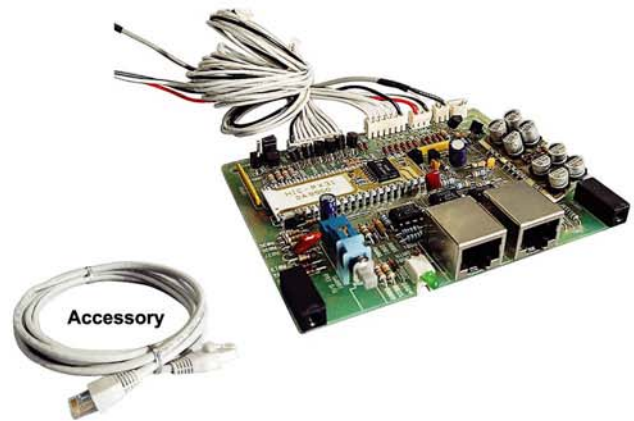

● SPECIFICATIONS

Dimension	202(W) x 51(H) x 156(D)mm
Weight	1.3kg

Instructions

To use the JRC10 microphone with the 5-zone mixer amplifier, it is necessary to install the circuit board module, as follows:

- Remove top panel
- Remove small panel on rear of amplifier (top right)
- Place module into slot
- Screw module firmly into the circuit board and make the following connections:
 - 10 pin plug – ignore unless you are using a JDM10A message module
 - 6 pin plug – plug into slot, front left (looking from the rear).
 - 3 pin plug – plug into socket, rear right.
 - 2 pin plug – plug into socket, rear mid right.

To the rear of the amplifier, you will see a 2-pin red and black plug on the wiring loom – unclip this from the loom by snipping the cable tie, and plug it into the 2-pin socket on the right hand side of the module board. Then, plug the cable from the JRC10 microphone into the priority input of the board.

The microphone should now work!